


**FIG. 1A**

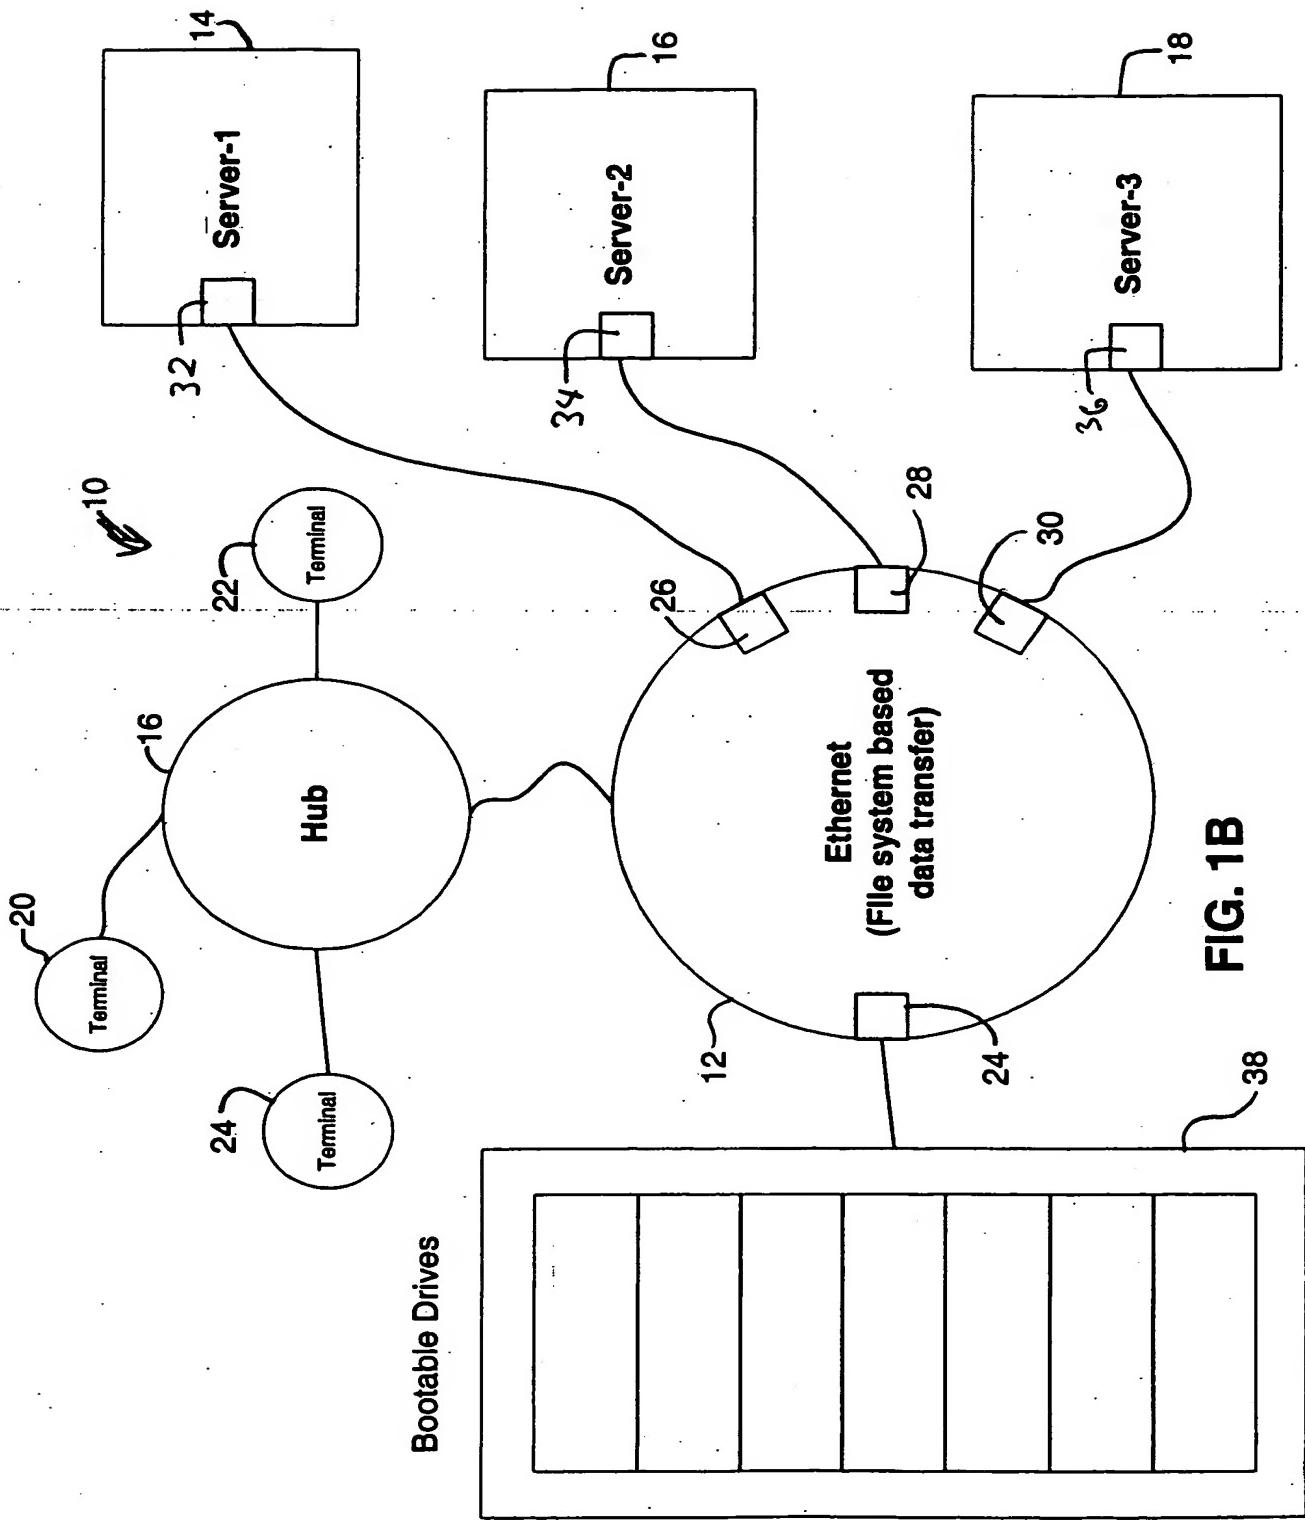

**FIG. 1B**

38



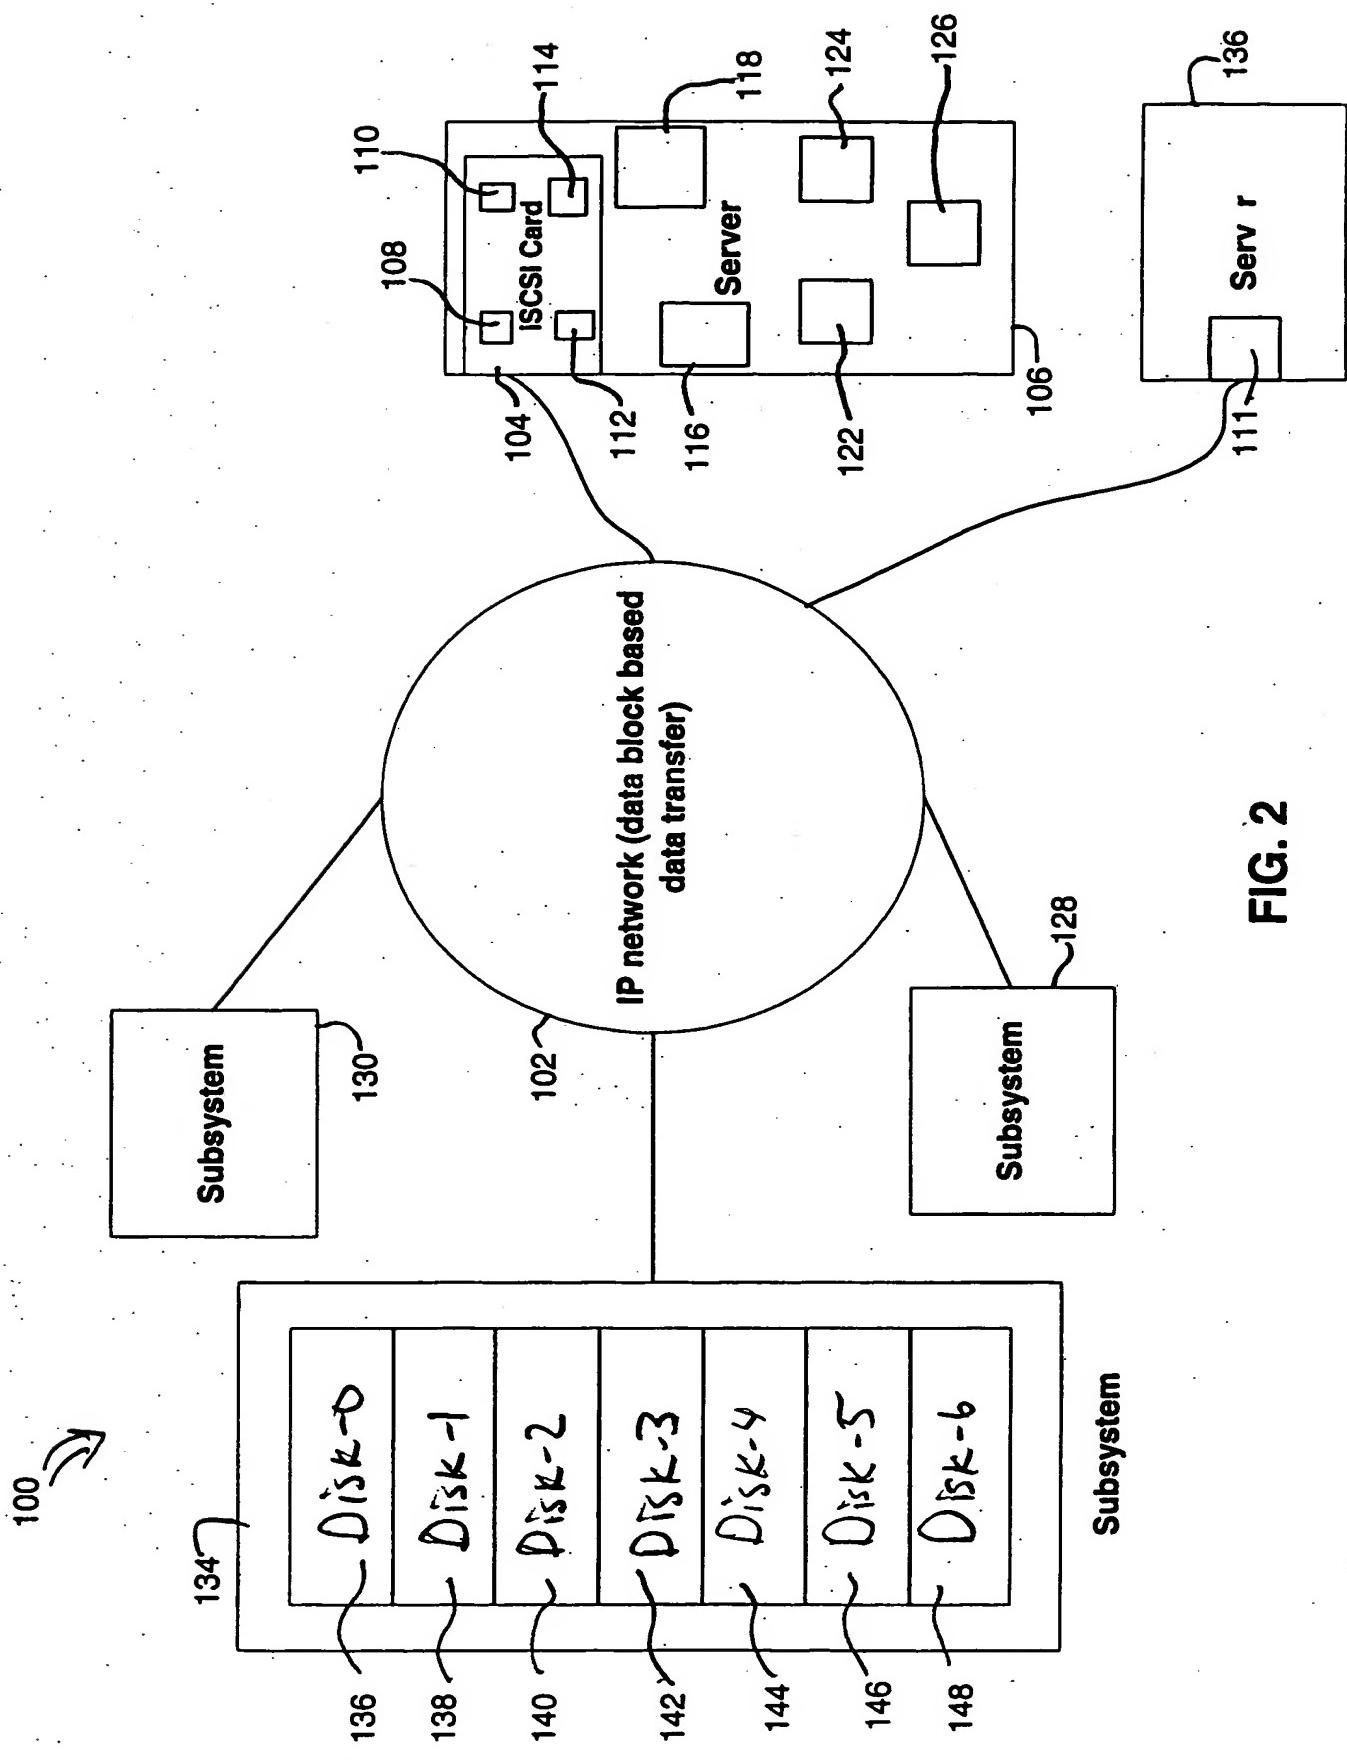



FIG. 2

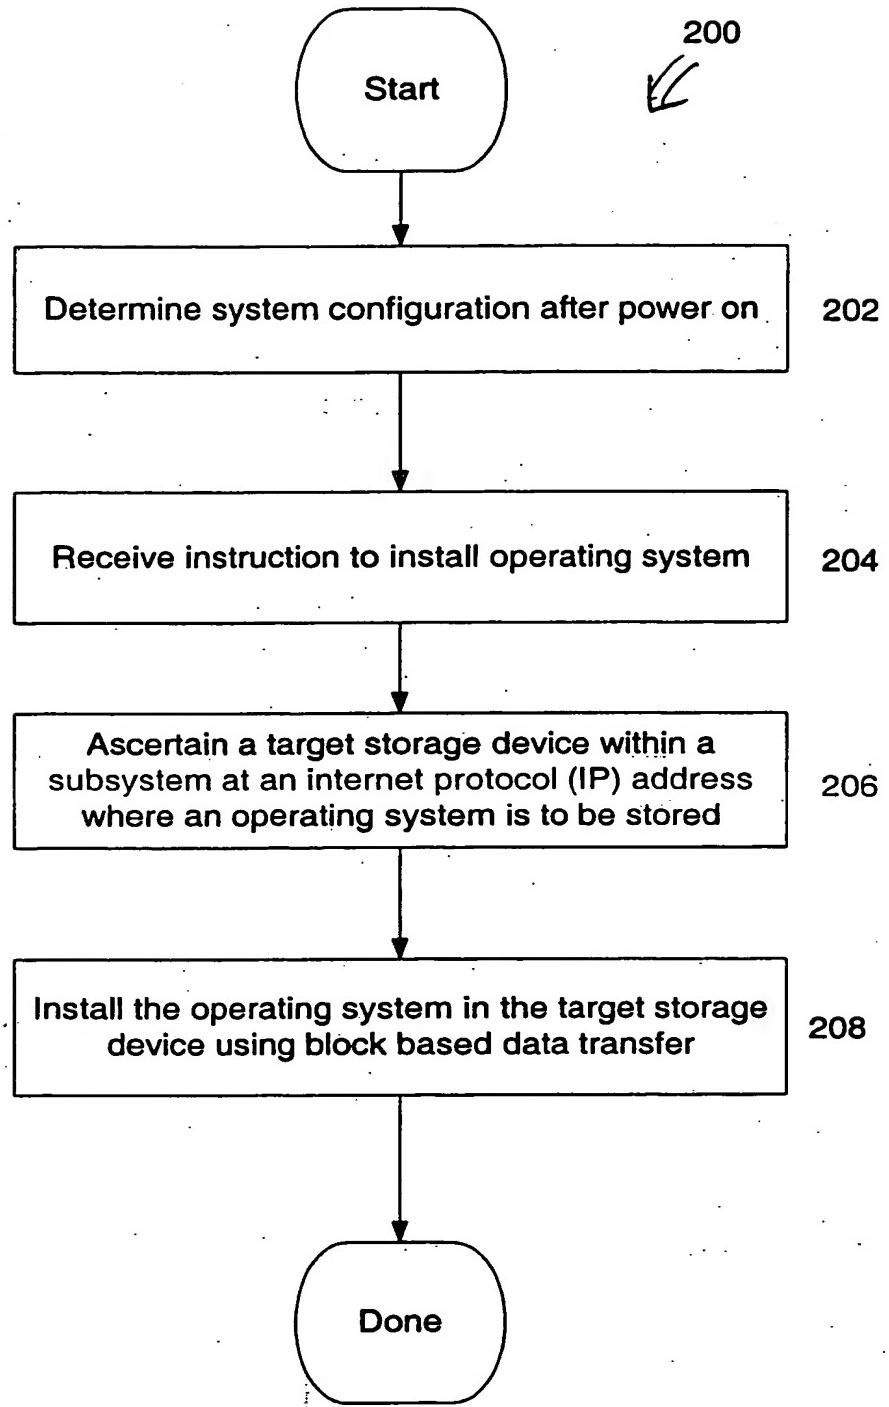


**FIG. 3**

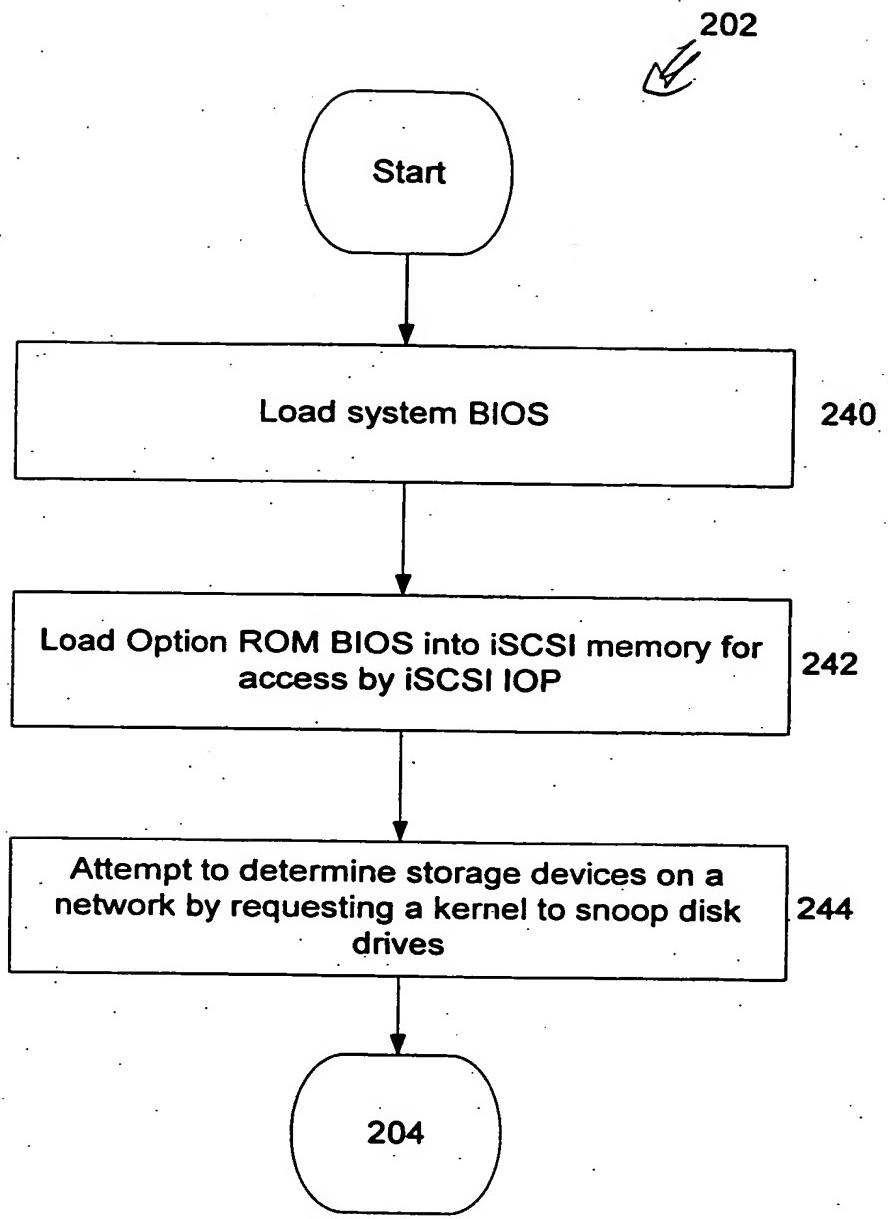


**FIG. 4**

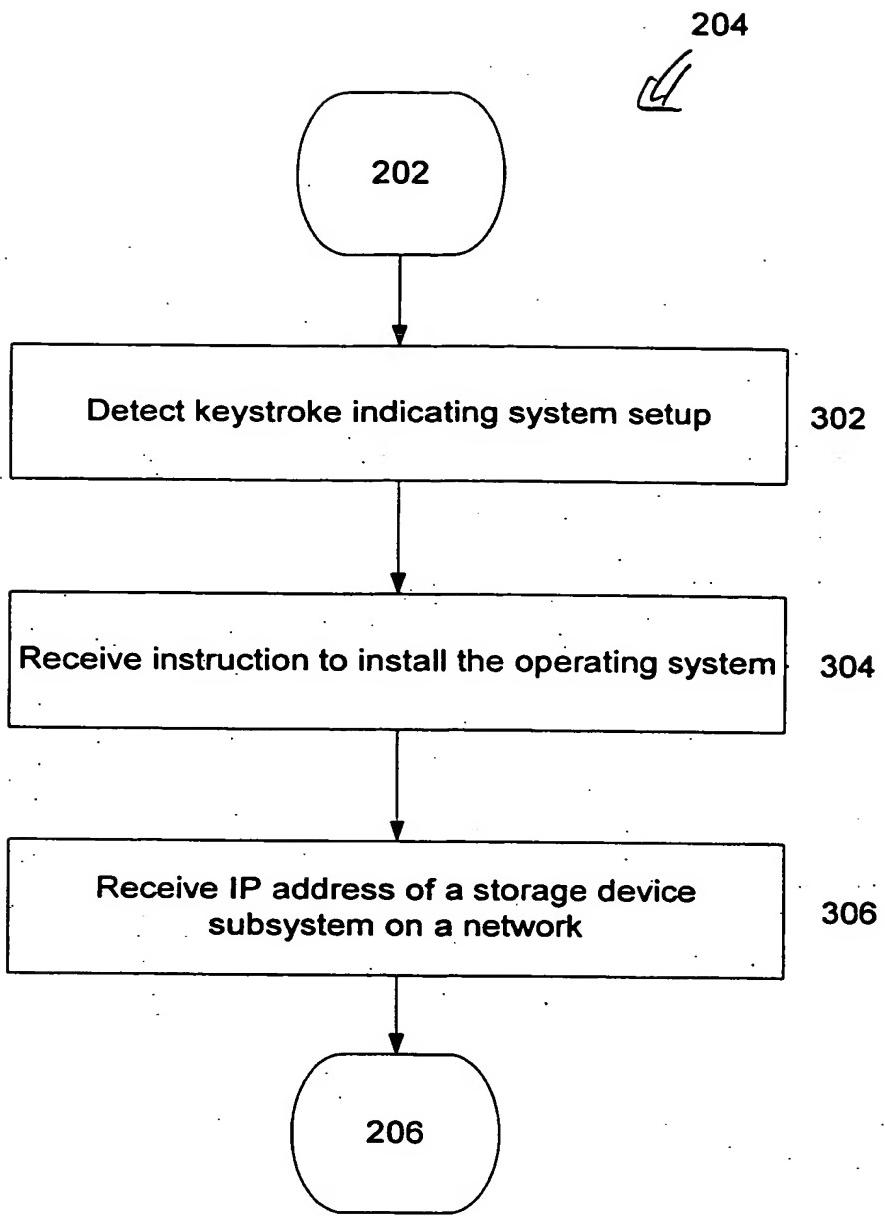

**FIG. 5**

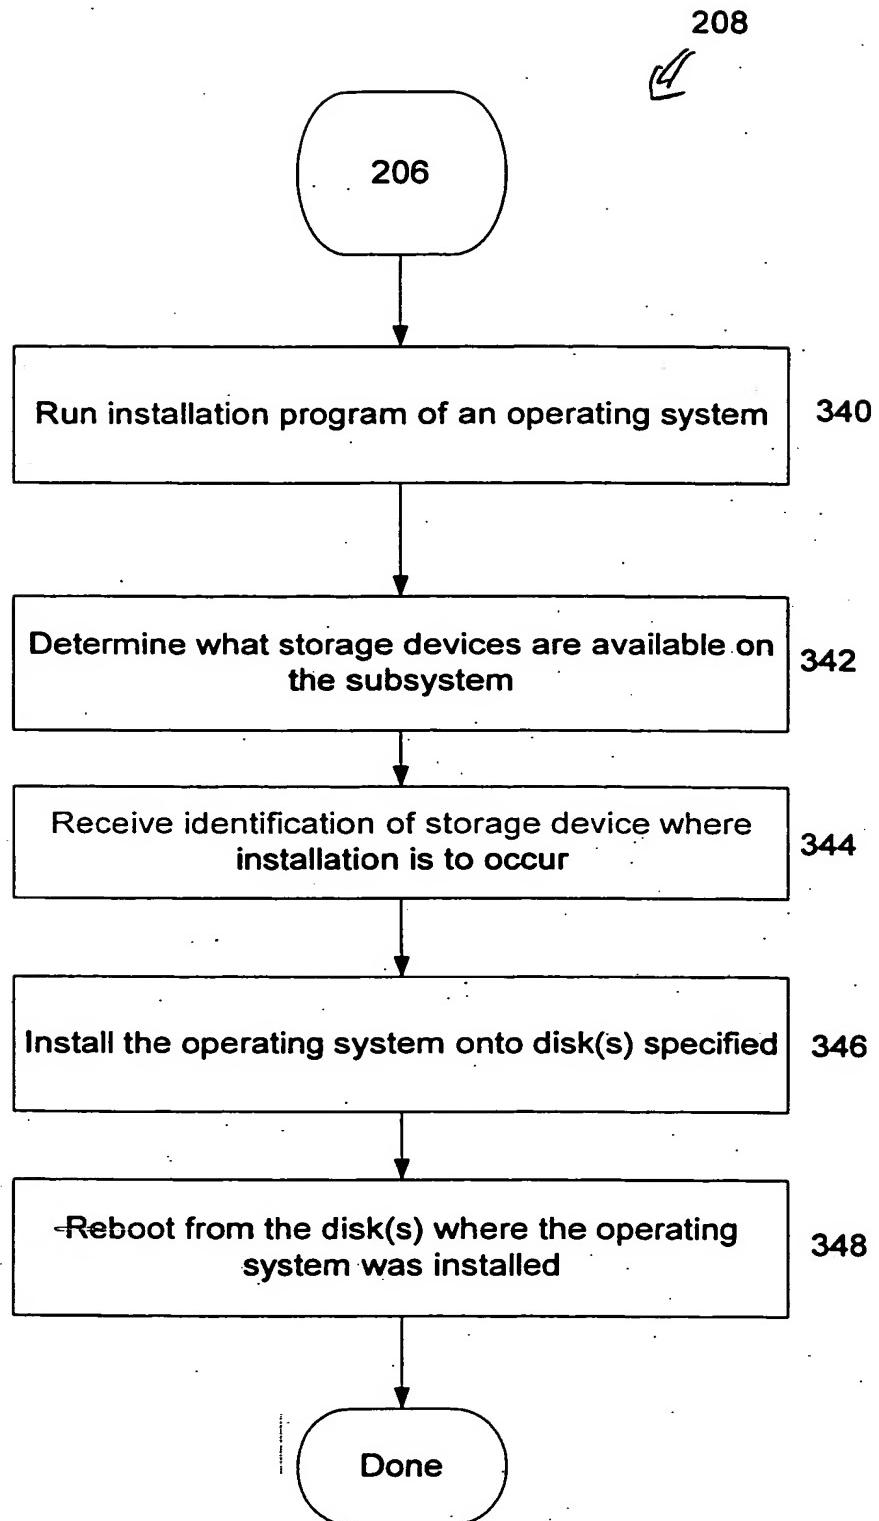

**FIG. 6**

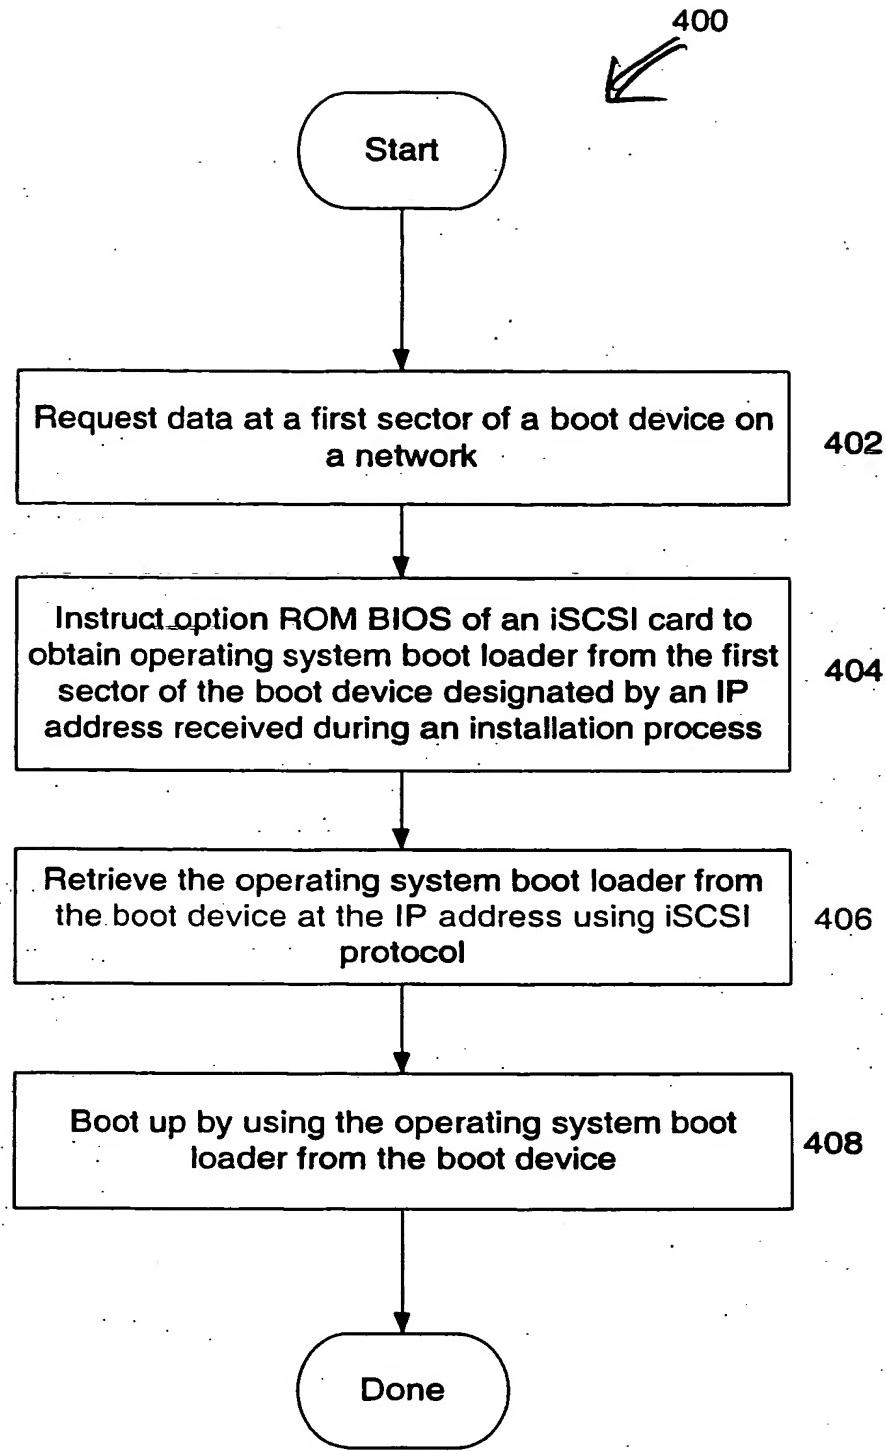

**FIG. 7**

460



Start

Set up a first server so an operating system is on  
a target storage device(s) in a network


470

Set up additional server(s) without user input  
after the first server is set up so the additional  
server(s) can boot up using the operating system  
from the target storage device on the network

472

Done

**FIG. 8**

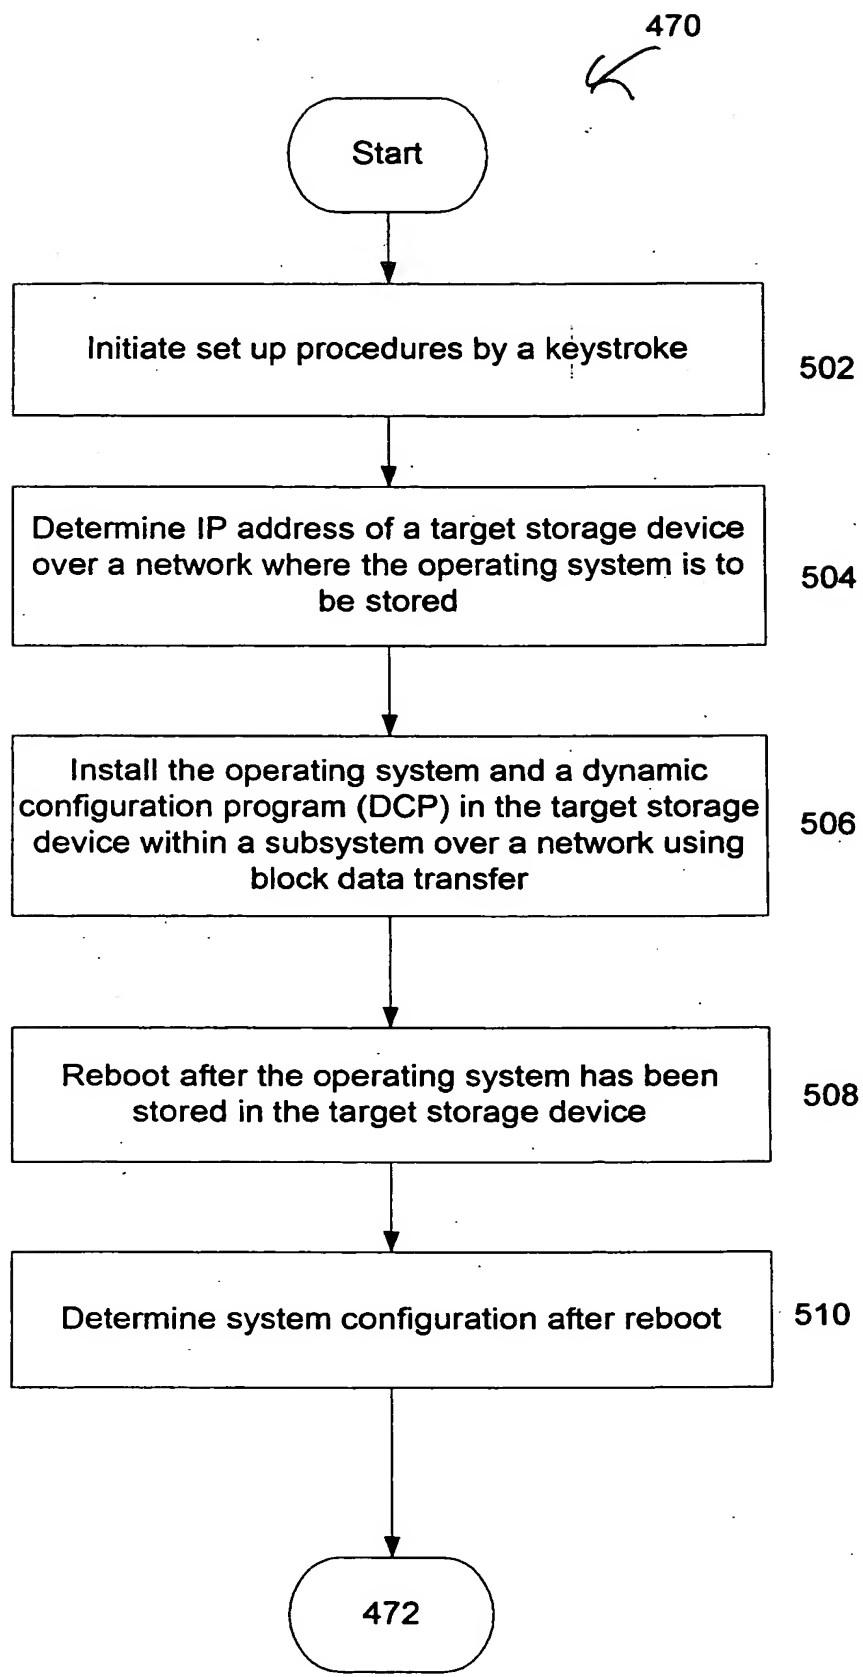

**FIG. 9**


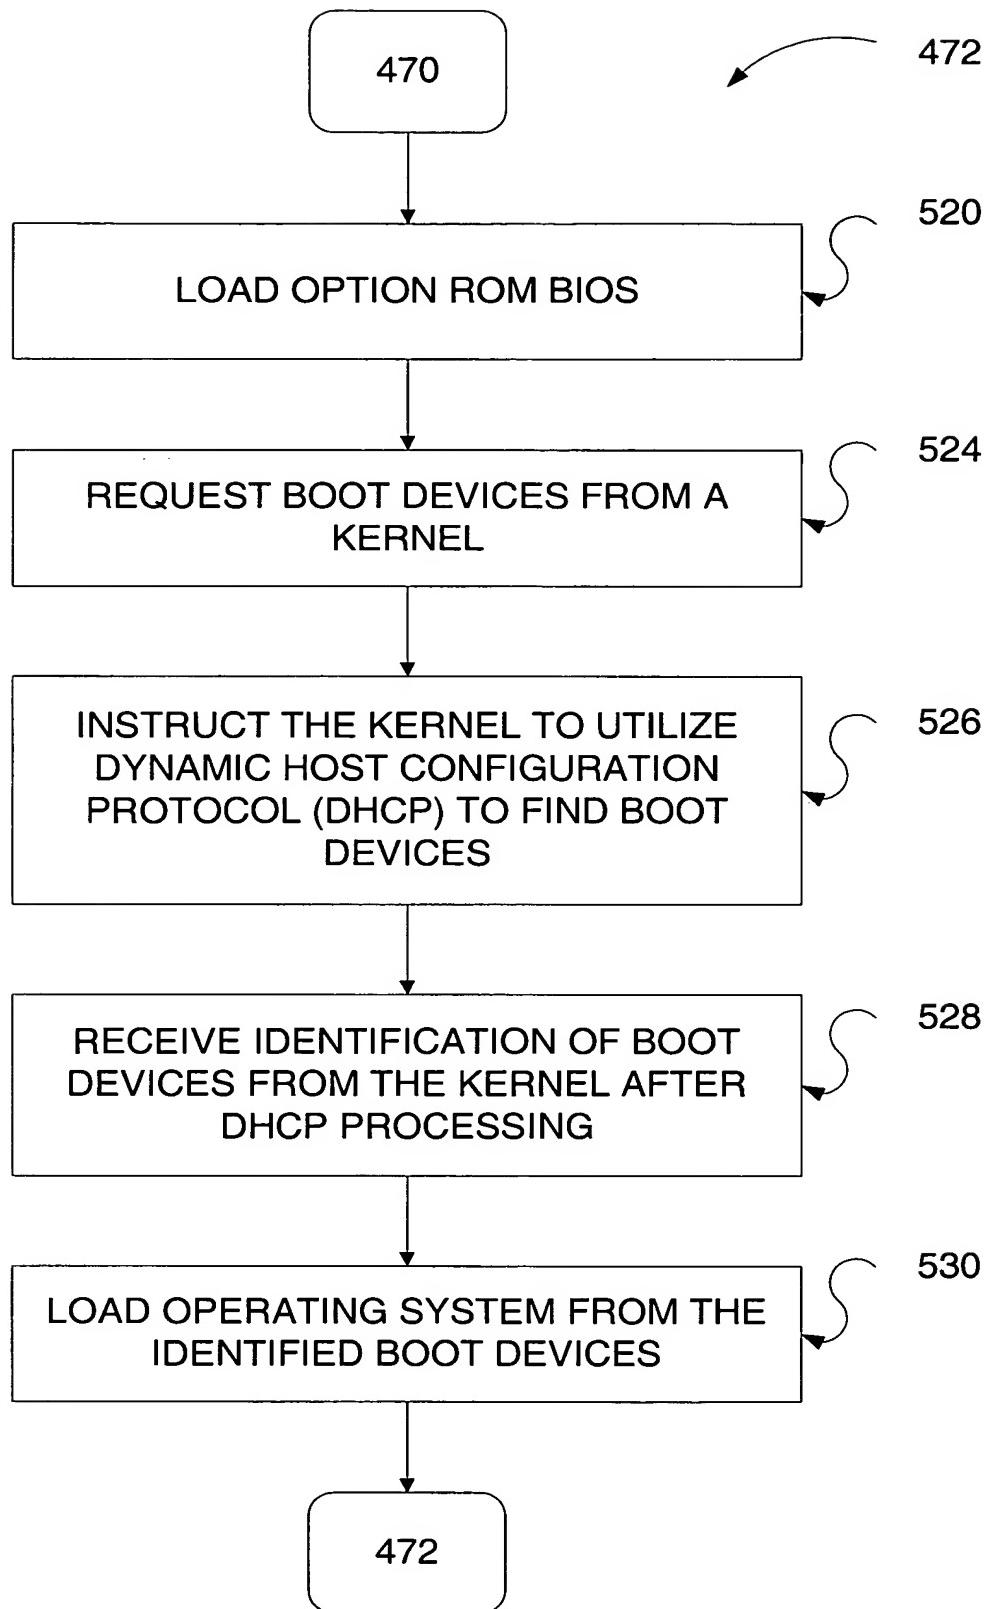


FIG. 10

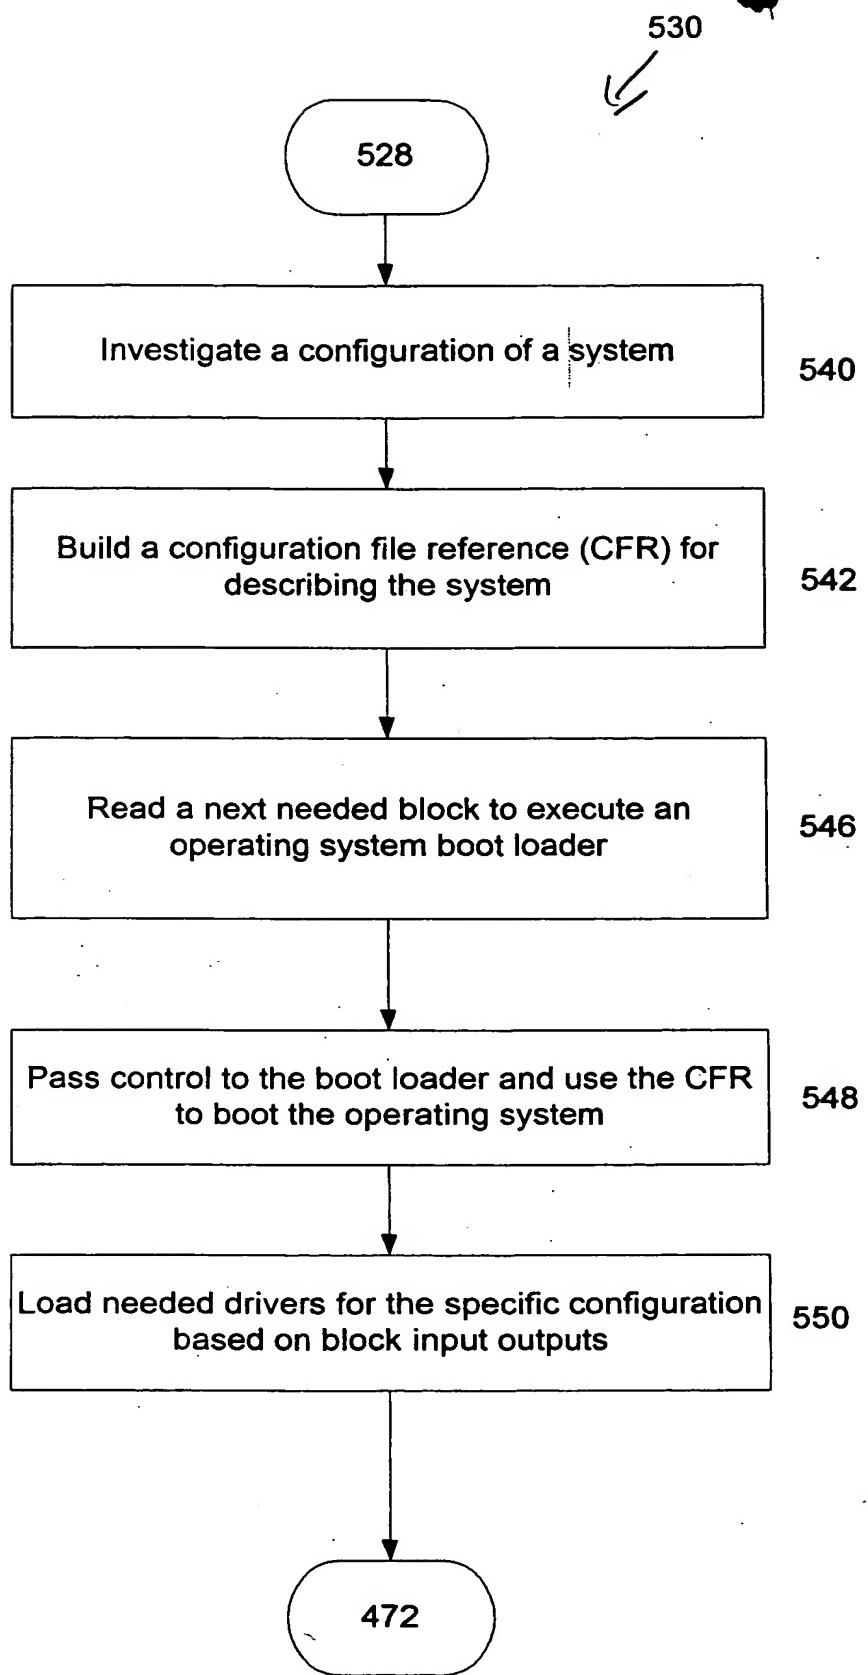

**FIG. 11**